

STRYKER Heavy Warjack

Assembly Guide




Magnet Placement

Prepare the Stryker warjack model by gluing magnets into the preset sockets. These magnet sockets are located in the connection points of the head, arms, and core upper body. This particular configuration will utilize 10 magnets measuring 3/16" for the arms and 5 magnets measuring 1/8" for the heads that are included in the warjack kit. Proper placement will use 3 magnets in the upper body and 3 magnets for the modular components. For the best results, glue the magnets into the upper body of the warjack first. Then, match all modular options to the opposite polarity of the body.


Tip: Be sure to test the polarity of the magnets before committing them to a socket with glue.

Tip: Placing glue onto the components of the model kit rather than directly onto a magnet will help prevent accidentally gluing magnets to one another.

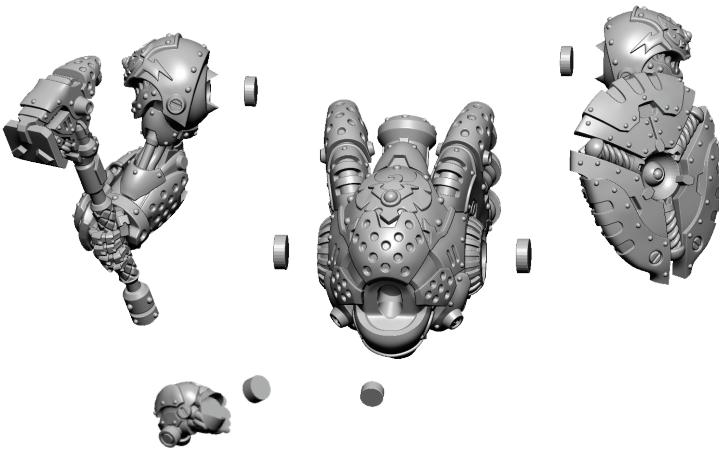


Step 1

Next, assemble non-modular components by gluing them together. Glue the upper warjack body to the lower torso. Once this is dry, glue both leg components to the lower torso area. To complete this step, glue the assembled model to the included 50 mm base.

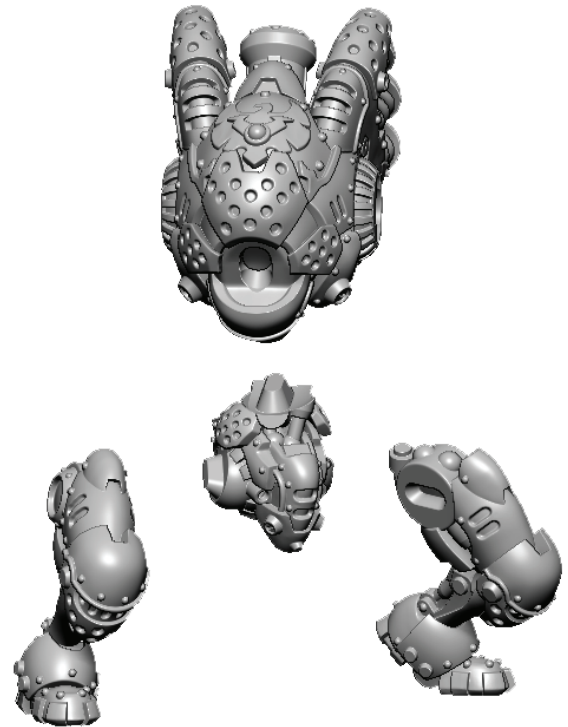

Step 2

Finally, using the previously magnetized modular components, attach the arms and head to the core upper body. A total of 15 magnets are included in the kit so that all of the additional modular components can be similarly magnetized.

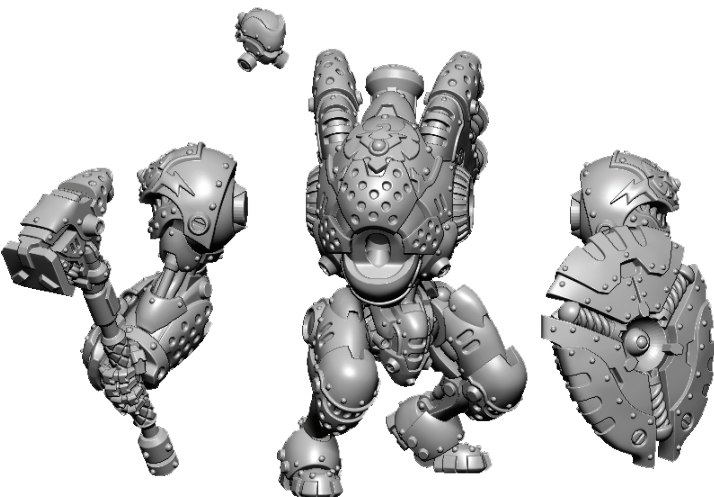

Assembled

